



GEYA®  
格亚电气



# 继电器插座 Relay socket

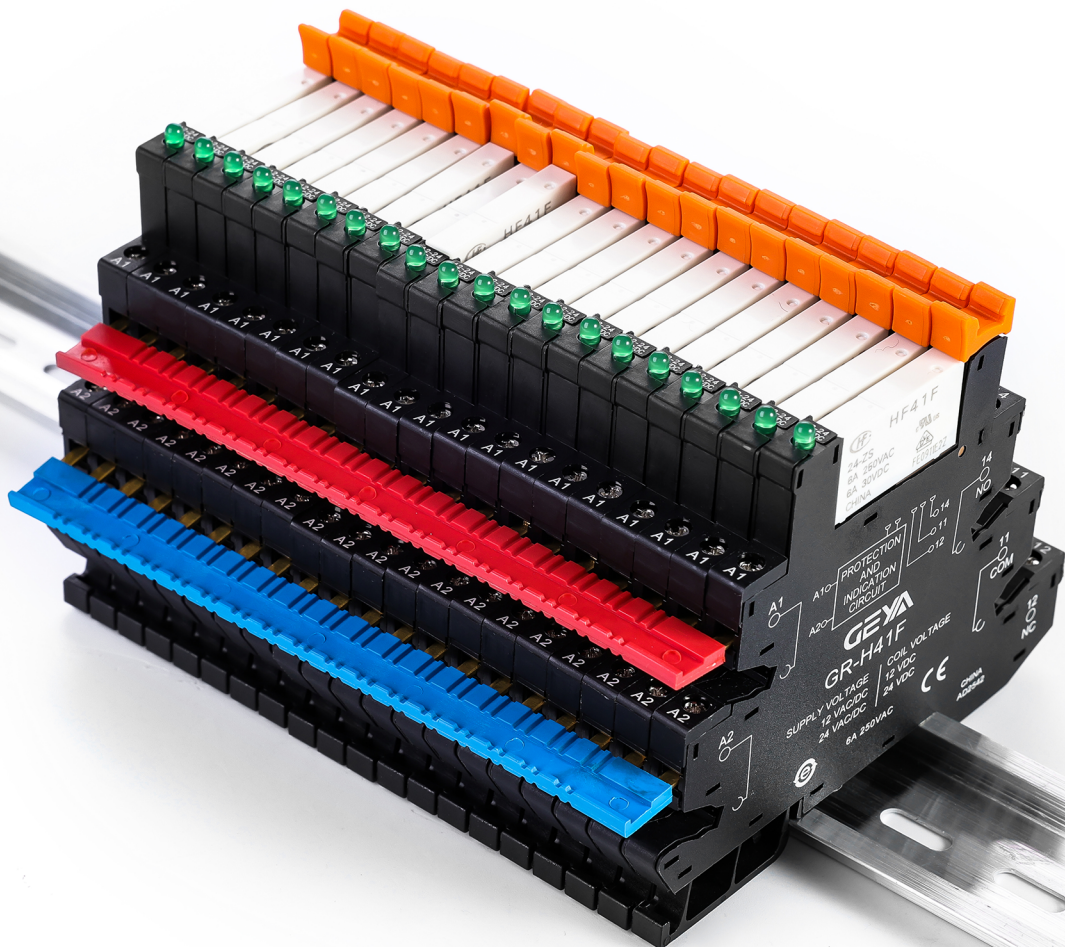

GR-H41F-LS




GR-H41F-L

## 产品性能 Products Specification


| 插座类型 Socket type               |            | GR-H41F-LS                       | GR-H41F-L  |
|--------------------------------|------------|----------------------------------|--|
| 额定负载<br>Rated Load             | 电流 Current | 6A                               |  |
|                                | 电压 Voltage | 250V                             |  |
| 介质耐压 Dielectric Strength       |            | 4000V/S<br>2500V/S               | 线圈/触点<br>Coil/contact<br>触点间<br>Between contacts |
| 螺钉扭矩 Screw torque              |            | 0.5Nm                            |  |
| 外连接导线 External connection wire |            | 20-16/0.5-1.5AWG/MM <sup>2</sup> |  |
| 使用环境 Ambient temperature       |            | -40℃~+70℃                        |  |
| 重量 Weight                      |            | 22g                              | 24g  |

## 端子配置内部连接 Wiring Diagram




## 外形尺寸、安装尺寸 Outline dimensions/Mount dimensions(mm)


GR-H41F-LS

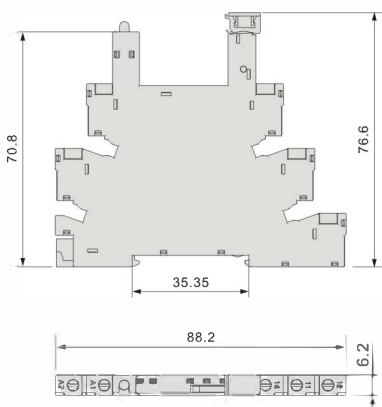


GR-H41F-L

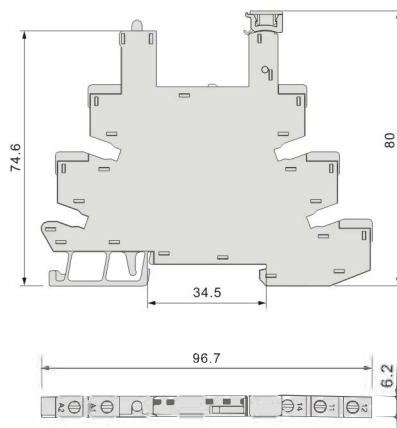

# 继电器插座 Relay socket



GR-H41F-TS




GR-H41F-T

## 产品性能 Products Specification


| 插座类型 Socket type               |            | GR-H41F-TS                       | GR-H41F-T                                  |
|--------------------------------|------------|----------------------------------|--|
| 额定负载<br>Rated Load             | 电流 Current | 6A                               |  |
|                                | 电压 Voltage | 250V                             |  |
| 介质耐压 Dielectric Strength       |            | 4000V/S<br>2500V/S               | 线圈/触点 Coil/contact<br>触点间 Between contacts |
| 螺钉扭矩 Screw torque              |            |                                  |  |
| 外连接导线 External connection wire |            | 20-16/0.5-1.5AWG/MM <sup>2</sup> |  |
| 使用环境 Ambient temperature       |            | -40℃ ~ +70℃                      |  |
| 重量 Weight                      |            | 22g                              | 24g  |

## 端子配置内部连接 Wiring Diagram




## 外形尺寸、安装尺寸 Outline dimensions/Mount dimensions(mm)

GR-H41F-TS

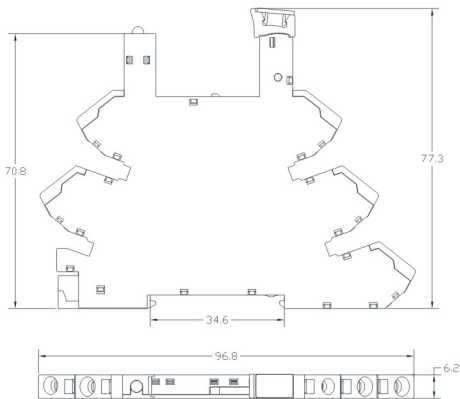

GR-H41F-T

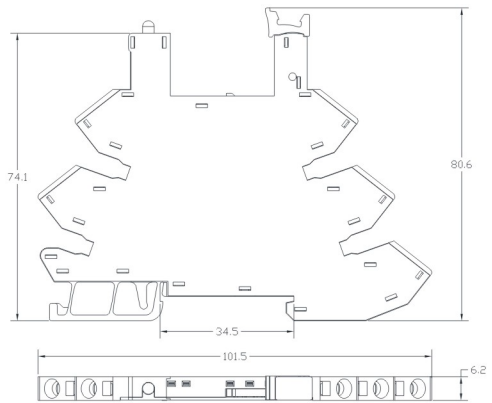


# 继电器插座 Relay socket



| 插座型号<br>Type       | 额定电压<br>Rated voltage | 额定电流<br>Rated current | 环境温度<br>Temperature | 继电器线圈输入电压<br>Input voltage | 适用继电器额定电压<br>Apply to relay the rated voltage | 输入电压极性<br>Input voltage polarity | 螺钉扭矩<br>Screw torque | 剥露导线长度<br>Stripped wire length |
|--------------------|-----------------------|-----------------------|---------------------|----------------------------|---|----------------------------------|----------------------|--------------------------------|
| GR-H41F-LS 12V/24V | 250VAC                | 6A                    | -40°C~70°C          | (12~24)V AC/DC             | (12~24)V AC/DC                                | 无                                | 0.5N.m               | 7mm                            |
| GR-H41F-LS 48V/60V | 250VAC                | 6A                    | -40°C~70°C          | (48~60)V AC/DC             | (48~60)V AC/DC                                | 无                                | 0.5N.m               | 7mm                            |
| GR-H41F-LS 110V    | 250VAC                | 6A                    | -40°C~55°C          | (110~125)V AC/DC           | 60V DC  | 无                                | 0.5N.m               | 7mm                            |
| GR-H41F-LS 230V    | 250VAC                | 6A                    | -40°C~55°C          | (220~240)V AC/DC           | 60V DC  | 无                                | 0.5N.m               | 7mm                            |
| GR-H41F-L 12V/24V  | 250VAC                | 6A                    | -40°C~70°C          | (12~24)V AC/DC             | (12~24)V AC/DC                                | 无                                | 0.5N.m               | 7mm                            |
| GR-H41F-L 48V/60V  | 250VAC                | 6A                    | -40°C~70°C          | (48~60)V AC/DC             | (48~60)V AC/DC                                | 无                                | 0.5N.m               | 7mm                            |
| GR-H41F-L 110V     | 250VAC                | 6A                    | -40°C~55°C          | (110~125)V AC/DC           | 60V DC  | 无                                | 0.5N.m               | 7mm                            |
| GR-H41F-L 230V     | 250VAC                | 6A                    | -40°C~55°C          | (220~240)V AC/DC           | 60V DC  | 无                                | 0.5N.m               | 7mm                            |

## 连接桥 Jumper

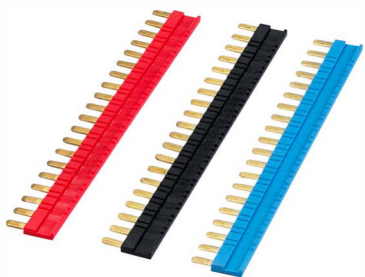

| 型号Model   | 颜色 color |
|-----------|----------|
| GR-H41F-L | 红 Red    |
| GR-H41F-L | 黑 Black  |
| GR-H41F-L | 蓝 blue   |

Jumper

